


P/N:134012120_Ver201510

1 Before Installation

Checking Package Contents

- 1* 5/8-Port 10/100/1000Mbps Switch
- 1* Power Adapter
- 1* Quick Installation Guide

Appearance

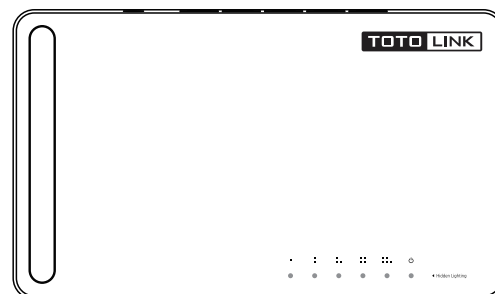

S505G

LED Indicators

| LED Indicator | Status | Indication |
|---------------|--------|---|
| PWR | on | Lights yellow when the switch is receiving power |
| | off | Powered off |
| LINK/ACT | on | Connected to network lights on, data transmission blinks yellow |
| | off | Not connected |




1 產品介紹

包裝內容

- 1* 5/8埠 10/100/1000Mbps交換器
- 1* 電源供應器
- 1* 快速安裝手冊

產品外觀

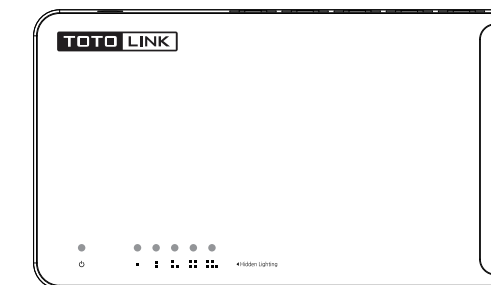


以S505G為例

LED燈號說明

| LED指示燈 | 狀態 | 說明 |
|----------|----|---------------------|
| PWR | 燈亮 | 電源接通黃燈亮起 |
| | 燈滅 | 未連接電源 |
| LINK/ACT | 燈亮 | 連接網路孔黃燈亮起, 資料傳輸黃燈閃爍 |
| | 燈滅 | 網路孔未連接 |

2 Hardware Installation Refer to the application scene graph below

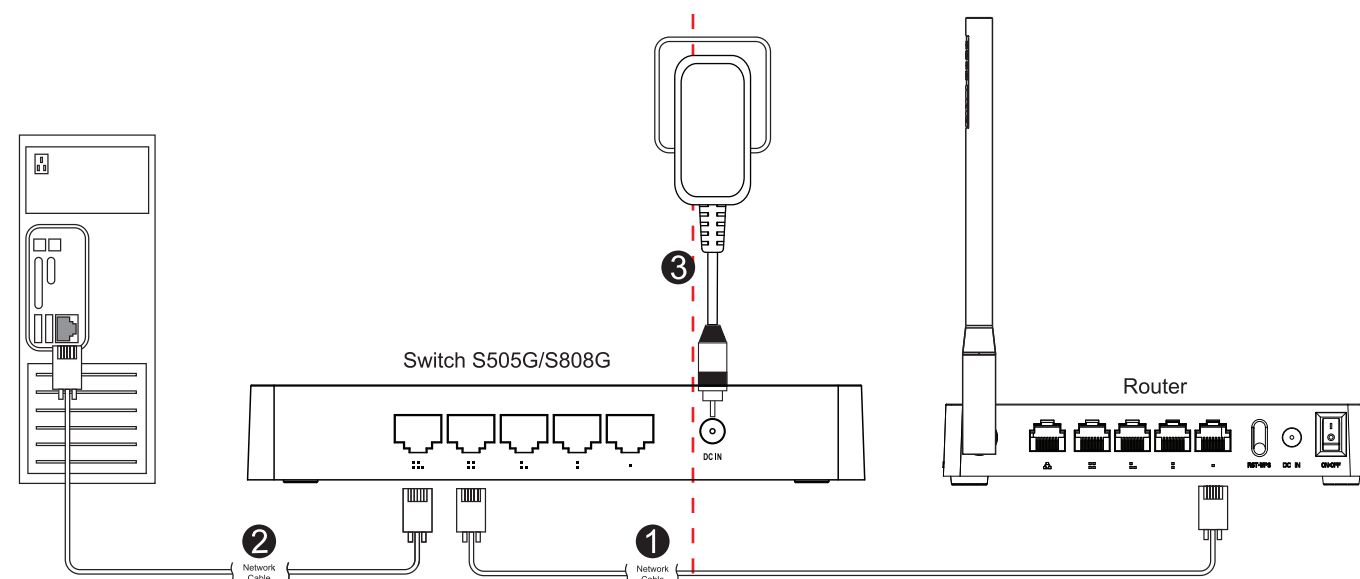


- 1 Connect one switch port to anyone of Router's LAN port.
- 2 Connect PC's RJ45 port to one switch port.
- 3 Plug power adapter into both switch's DC IN port and outlet.

SPEC

| | |
|----------------------|--|
| Standards | -IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab |
| Interface | 5/8*10/100/1000Mbps auto-negotiation RJ-45 Ports (Auto MDI/MDIX) |
| Power Supply | S505G: 9V/0.5A; S808G: 9V/0.8A |
| Dimensions | 163mm x 106mm x 25mm (L x W x H) |
| LED | 1* Power, 5 *LINK /Act |
| MAC Address Learning | Auto-learning, auto-aging |
| MAC Address Table | 8K |

2 接線方式 請參考下列說明

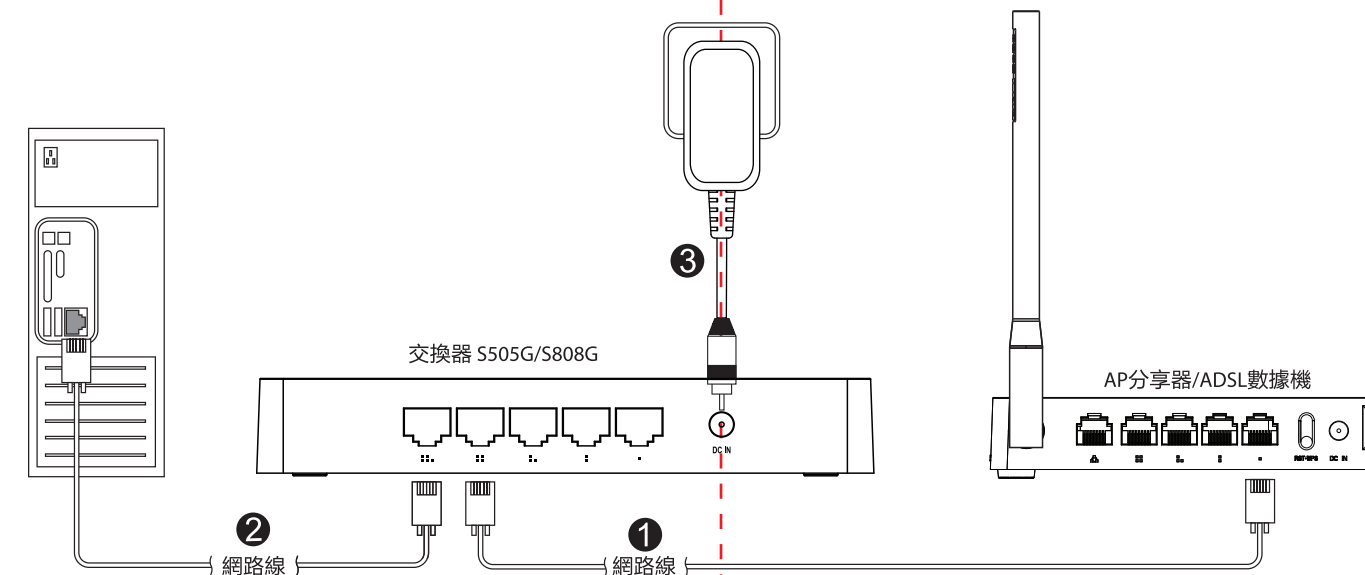

- 1 使用網路線, 連接交換器(任一網路孔)與AP分享器/ADSL數據機的區域網路孔。
- 2 使用第二條網路線, 連接交換器(任一網路孔)與電腦的網路孔。
- 3 連接電源。

產品規格

| | |
|----------------------|--|
| 通訊協定 | -IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab |
| 連接埠 | 5/8埠10/100/1000Mbps自動調整RJ-45標準乙太網路連接埠(Auto MDI/MDIX) |
| 電源供應 | S505G: 9V/0.5A; S808G: 9V/0.8A |
| 尺寸 | 163mm x 106mm x 25mm (長 x 寬 x 高) |
| LED燈 | 1個Power, 5/8個LINK /ACT |
| MAC Address Learning | Auto-learning, auto-aging |
| MAC位址列表 | 8K |